
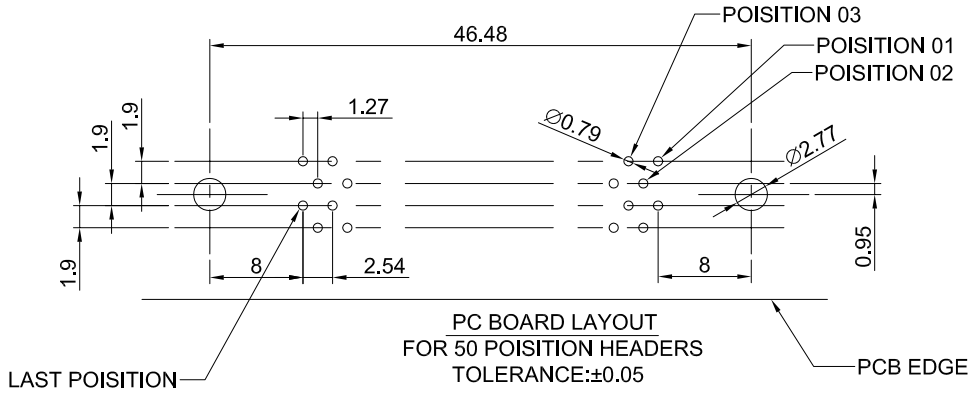



ELECTRICAL CHARACTERISTICS
 CONTACT CURRENT RATING:1AMPERE
 DIELECTRIC WITHSTANDING VOLTAGE:500 VAC
 INSULATION RESISTANCE:1000 MEGOHMS MIN.
 CONTACT RESISTANCE:25 MILLIOHMS MAX.

MATERIALS
 CONTACTS:COPPER ALLOY
 INSULATOR:THERMOPLASTIC 94V-0
 SHELL:COLD ROLLER STEEL
 BRACKET:ZINC ALLOY

FINISHES
 CONTACT:5μ" MIN. GOLD ON MATING END;
 TIN ON TERMINATION END;
 ALL UNDERPLATED NICKEL
 SHELL:NICKEL OVER COPPER
 BRACKET:ZINC, PLATED NICKEL OVER COPPER

ENVIRONMENT
 OPERATION TEMPERATURE: -55°C TO + 85°C

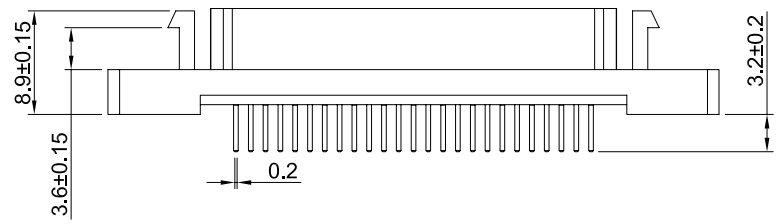

TITLE: SCSI-II (SOCKET 180°)		SHEET: 1 / 1	REV. B
DWG#: R-ZS-013050-1C		CHECKED: Gary Kang	
UNIT: mm	SCALE: 1.5:1	FINISH:	APPROVED: George Yang
TOLERANCE: Angle:±1° X.±0.25 .X±0.2 .XX±0.15		MATERIAL: RoHS Compliant	DATE: 05/19/2011
THIRD ANGLE PROJECTION		DRAWN: Marco	