



IDC AREA



DETAIL A
SCALE 5:1

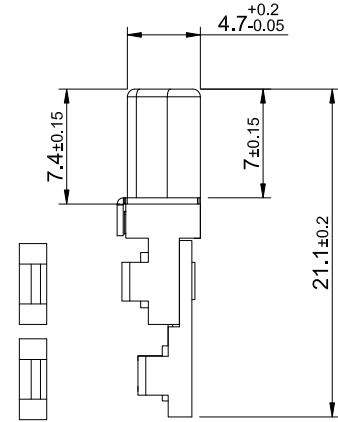

ELECTRICAL CHARACTERISTICS
 CONTACT CURRENT RATING: 0.5 AMPERE
 DIELECTRIC WITHSTANDING VOLTAGE: 250 VAC
 INSULATION RESISTANCE: 500 MEGOHMS MIN.
 CONTACT RESISTANCE: 80 mΩ MAX.

MATERIALS
 CONTACTS: COPPER ALLOY
 INSULATOR: THERMOPLASTIC 94V-0
 SHELL: COLD ROLLER STEEL

FINISHES
 CONTACT: 30 μ" MIN. GOLD ON MATING END;
 ALL UNDERPLATED NICKEL
 SHELL: NICKEL OVER COPPER

ENVIRONMENT
 OPERATION TEMPERATURE: -55°C TO +85°C

| | | | | | | |
|---|---|----------------------|-------------------------------|---------------------------------|------------------------------|--|
| ALL BEST ELECTRONICS CO., LTD. | TITLE: VHDCl 0.8mm Male Offset IDC Type | | SHEET: 1/1 | | REV.: C | |
| | DWG#: R-HI-008068-B | | CHECKED: Gary Yang | | APPROVED: George Yang | |
| | UNIT: mm | SCALE: A4 2:1 | FINISH: | MATERIAL: RoHS Compliant | | |
| | TOLERANCE: Angle: ± 1° X.± 0.25 .X± 0.2 .XX± 0.15 | | THIRD ANGLE PROJECTION | DRAWN: Sheng | DATE: 06/22/2017 | |