
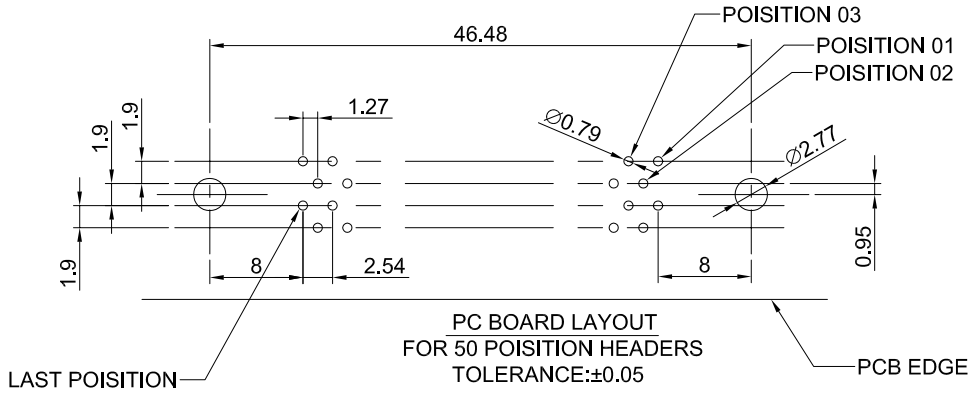



**ELECTRICAL CHARACTERISTICS**  
 CONTACT CURRENT RATING:1AMPERE  
 DIELECTRIC WITHSTANDING VOLTAGE:500 VAC  
 INSULATION RESISTANCE:1000 MEGOHMS MIN.  
 CONTACT RESISTANCE:25 MILLIOHMS MAX.

**MATERIALS**  
 CONTACTS:COPPER ALLOY  
 INSULATOR:THERMOPLASTIC 94V-0  
 SHELL:COLD ROLLER STEEL  
 BRACKET:ZINC ALLOY

**FINISHES**  
 CONTACT:5μ" MIN. GOLD ON MATING END;  
 TIN ON TERMINATION END;  
 ALL UNDERPLATED NICKEL  
 SHELL:NICKEL OVER COPPER  
 BRACKET:ZINC, PLATED NICKEL OVER COPPER

**ENVIRONMENT**  
 OPERATION TEMPERATURE: -55°C TO + 85°C

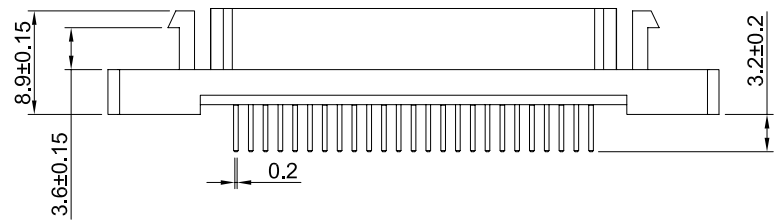

TITLE: SCSI-II (SOCKET 180°)		SHEET: 1 / 1	REV. B
DWG#: R-ZS-013050-1C		CHECKED: Gary Kang	
UNIT: mm	SCALE: 1.5:1	FINISH:	MATERIAL: RoHS Compliant
TOLERANCE: Angle:±1° X.±0.25 .X±0.2 .XX±0.15		DRAWN: Marco	APPROVED: George Yang
THIRD ANGLE PROJECTION		DATE: 05/19/2011	