



DETAIL A
SCALE 5:1






DETAIL B
SCALE 5:1

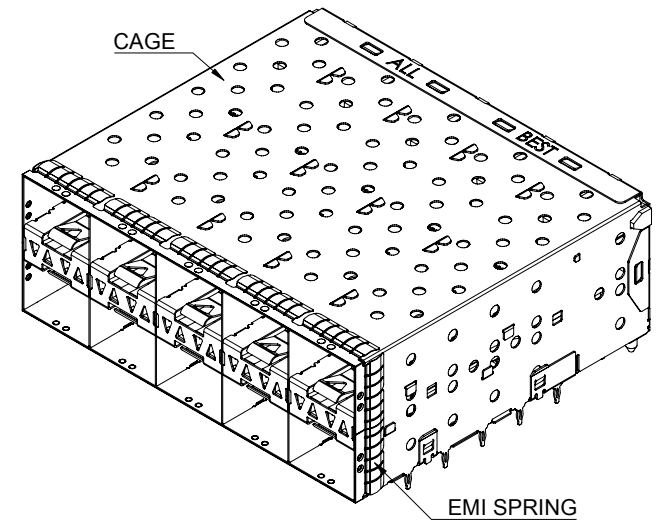

MATERIAL
 CAGE: NICKEL SILVER
 LIGHT PIPE: PC
 CONNECTOR: LCP 94V-0
 COPPER ALLOY
 EMI SPRING: STAINLESS STEEL

FINISH
 CONTACT: 15µ" MIN. GOLD ON MATING END;
 30µ" MIN. MATTE TIN ON TERMINATION END;
 ALL UNDERPLATED 50µ" MIN. NICKEL

ELECTRICAL CHARACTERISTICS
 CONTACT CURRENT RATING: 0.5 AMPERE
 VOLTAGE RATING: 30 VAC
 CONTACT RESISTANCE: 80 mΩ MAX.
 DIELECTRIC WITHSTANDING VOLTAGE: 300 VAC

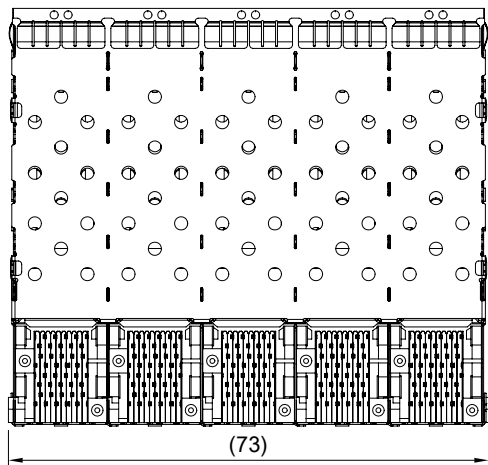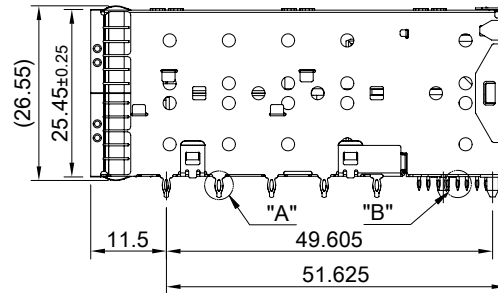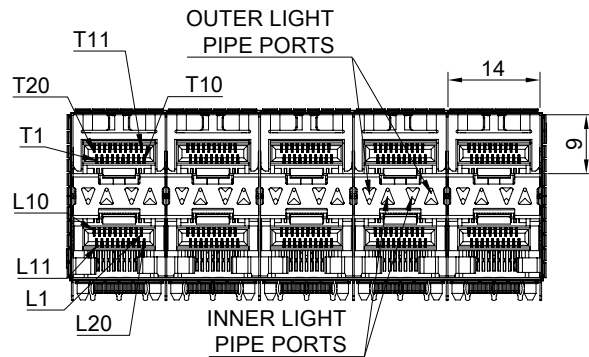


TITLE: Stacked SFP+ 2X5 ASS'Y w/ Internal Thermal Solution & Light Pipe

DWG#: R-OP-008200-7-F-N2-62


UNIT: mm SCALE: A4 5:6 FINISH: SHEET: 1/3 REV. REF

TOLERANCE: Angle: ± 1° THIRD ANGLE PROJECTION MATERIAL: RoHS Compliant CHECKED:


X ± 0.25 .X ± 0.20 .XX ± 0.15 DRAWN: Laura DATE: 03/14/2024 APPROVED:

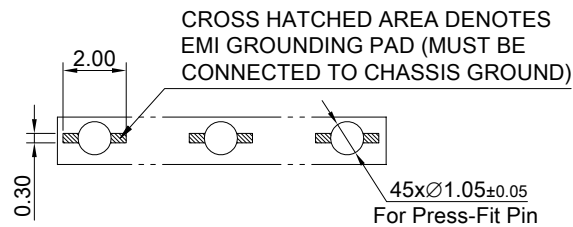


DETAIL C
SCALE 4:1

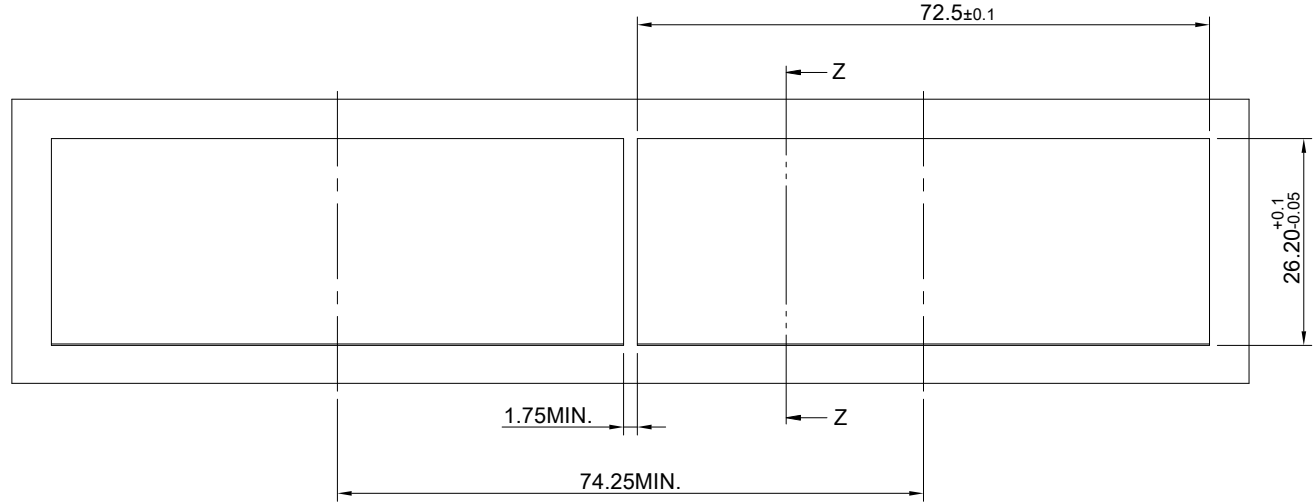

RECOMMENDED BEZEL CUT-OUT SPACING DETAIL
BEZEL THICKNESS 0.8~2.6MM



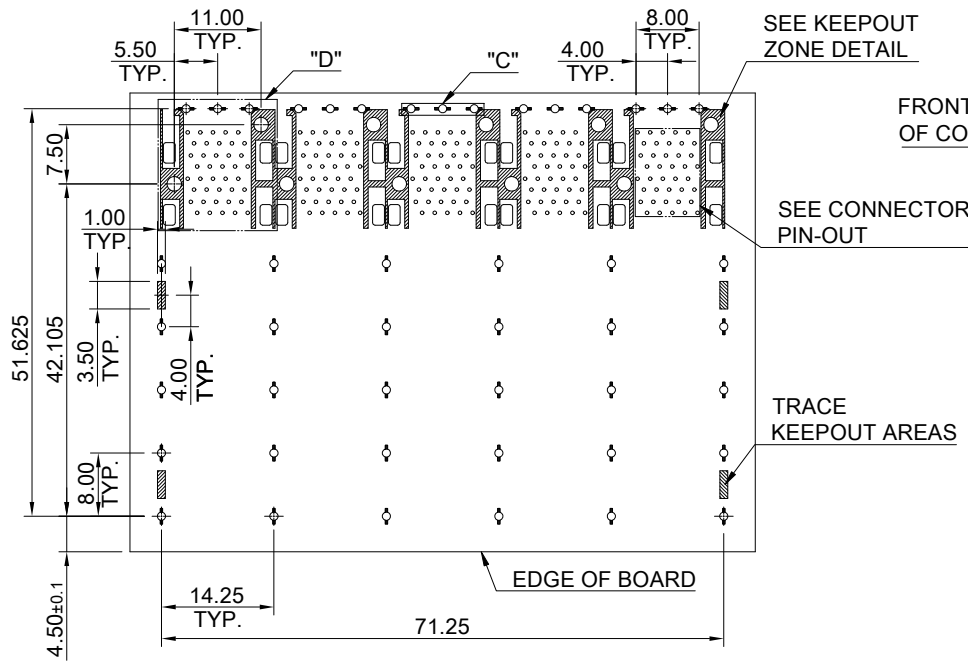


RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05
MINIMUM PCB THICKNESS OF 1.57mm

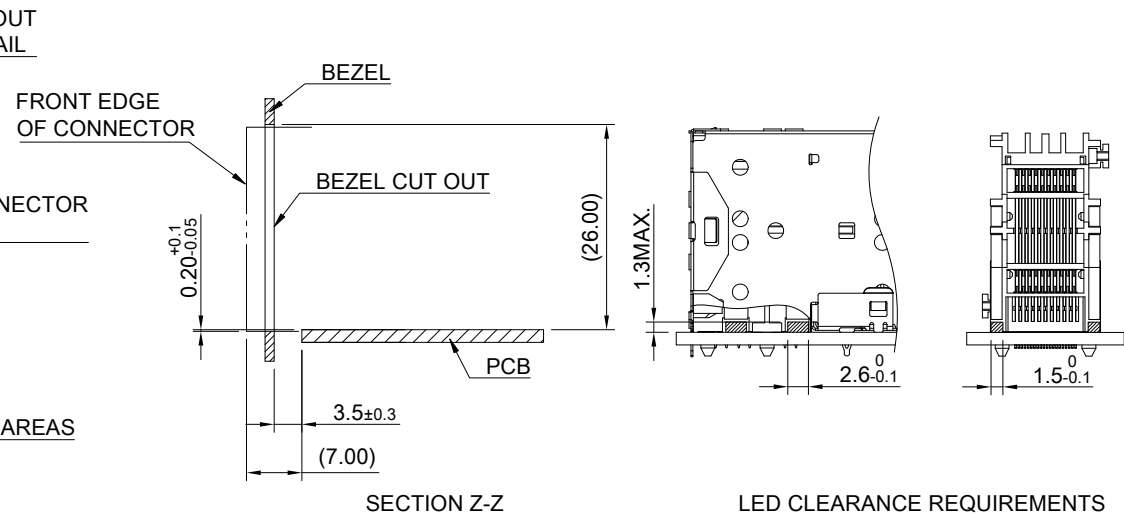


SECTION Z-Z LED CLEARANCE REQUIREMENTS

	TITLE: Stacked SFP+ 2X5 ASS'Y w/ Internal Thermal Solution & Light Pipe			SHEET:	REV.
	DWG#: R-OP-008200-7-F-N2-62			2/3	REF
UNIT:	SCALE:	FINISH:	CHECKED:		
mm	A4 1:1				
TOLERANCE: Angle: ± 1°		MATERIAL:	APPROVED:		
X ± 0.15 .X ± 0.10 .XX ± 0.05		RoHS Compliant			
DRAWN: Laura			DATE: 03/14/2024		

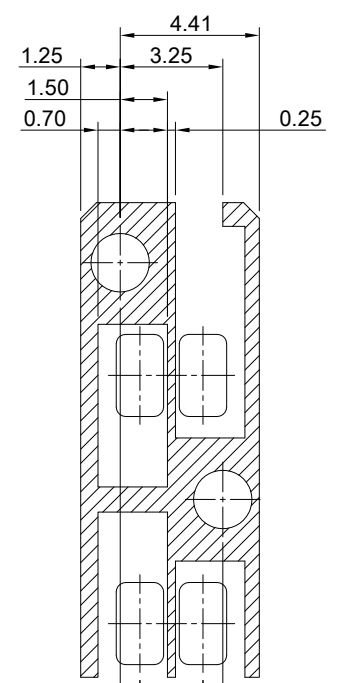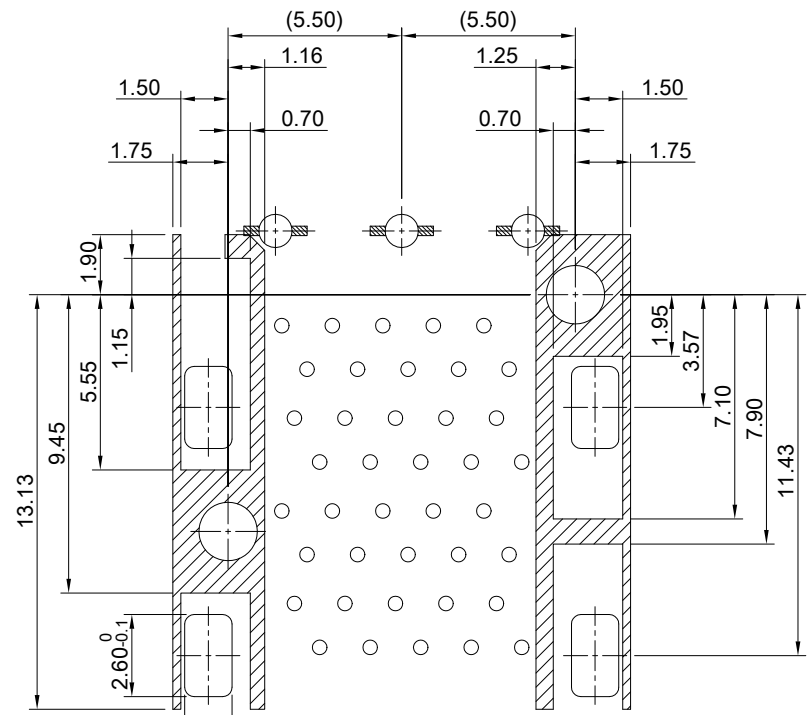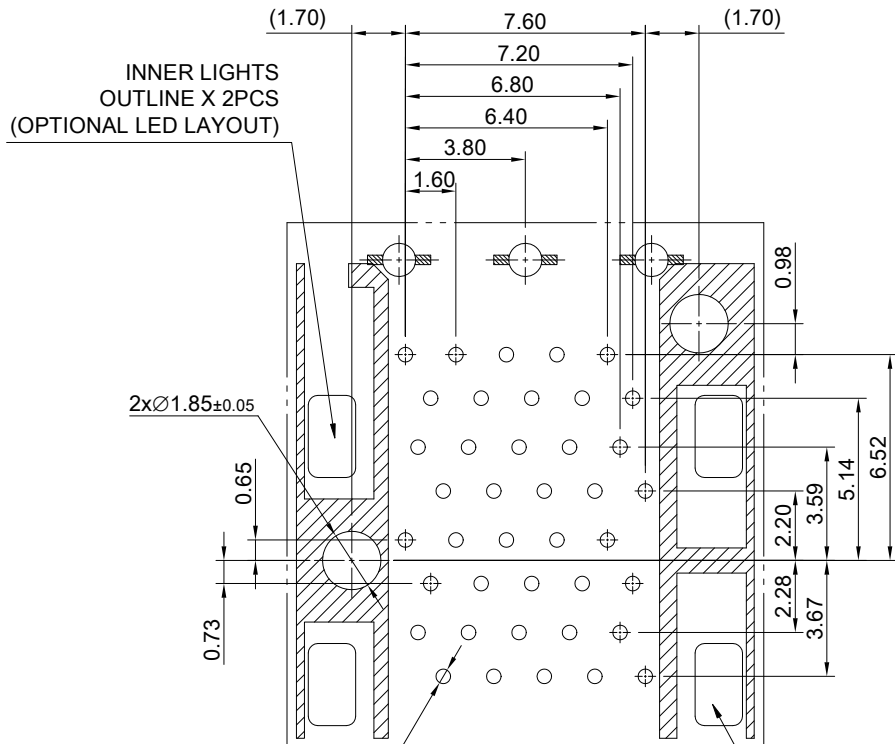

KEEPOUT ZONE DETAIL

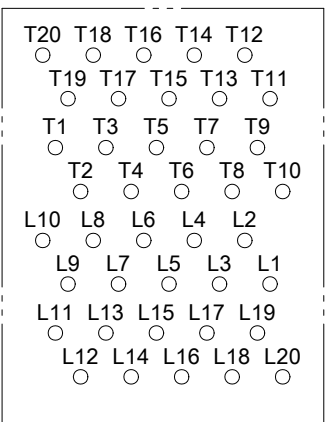

TITLE: Stacked SFP+ 2X5 ASS'Y w/ Internal Thermal Solution & Light Pipe			
DWG#: R-OP-008200-7-F-N2-62		SHEET: 3/3	REV. REF
UNIT: mm	SCALE: A4 4:1	FINISH:	
TOLERANCE: Angle: $\pm 1^\circ$ X: ± 0.15 .X: ± 0.10 .XX: ± 0.05		MATERIAL: RoHS Compliant	APPROVED:
THIRD ANGLE PROJECTION		DRAWN: Laura	DATE: 03/14/2024
CHECKED:		APPROVED:	